

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 23 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 5-7-10
Party Chief: Greene / Wilcoxen
Crew: Taylor
Type of Marker: Harrison
Method of Establishment: County: 10-11-1994
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14022301
N: 488 555.285 0(m)
E: 46 651.993 0(m)

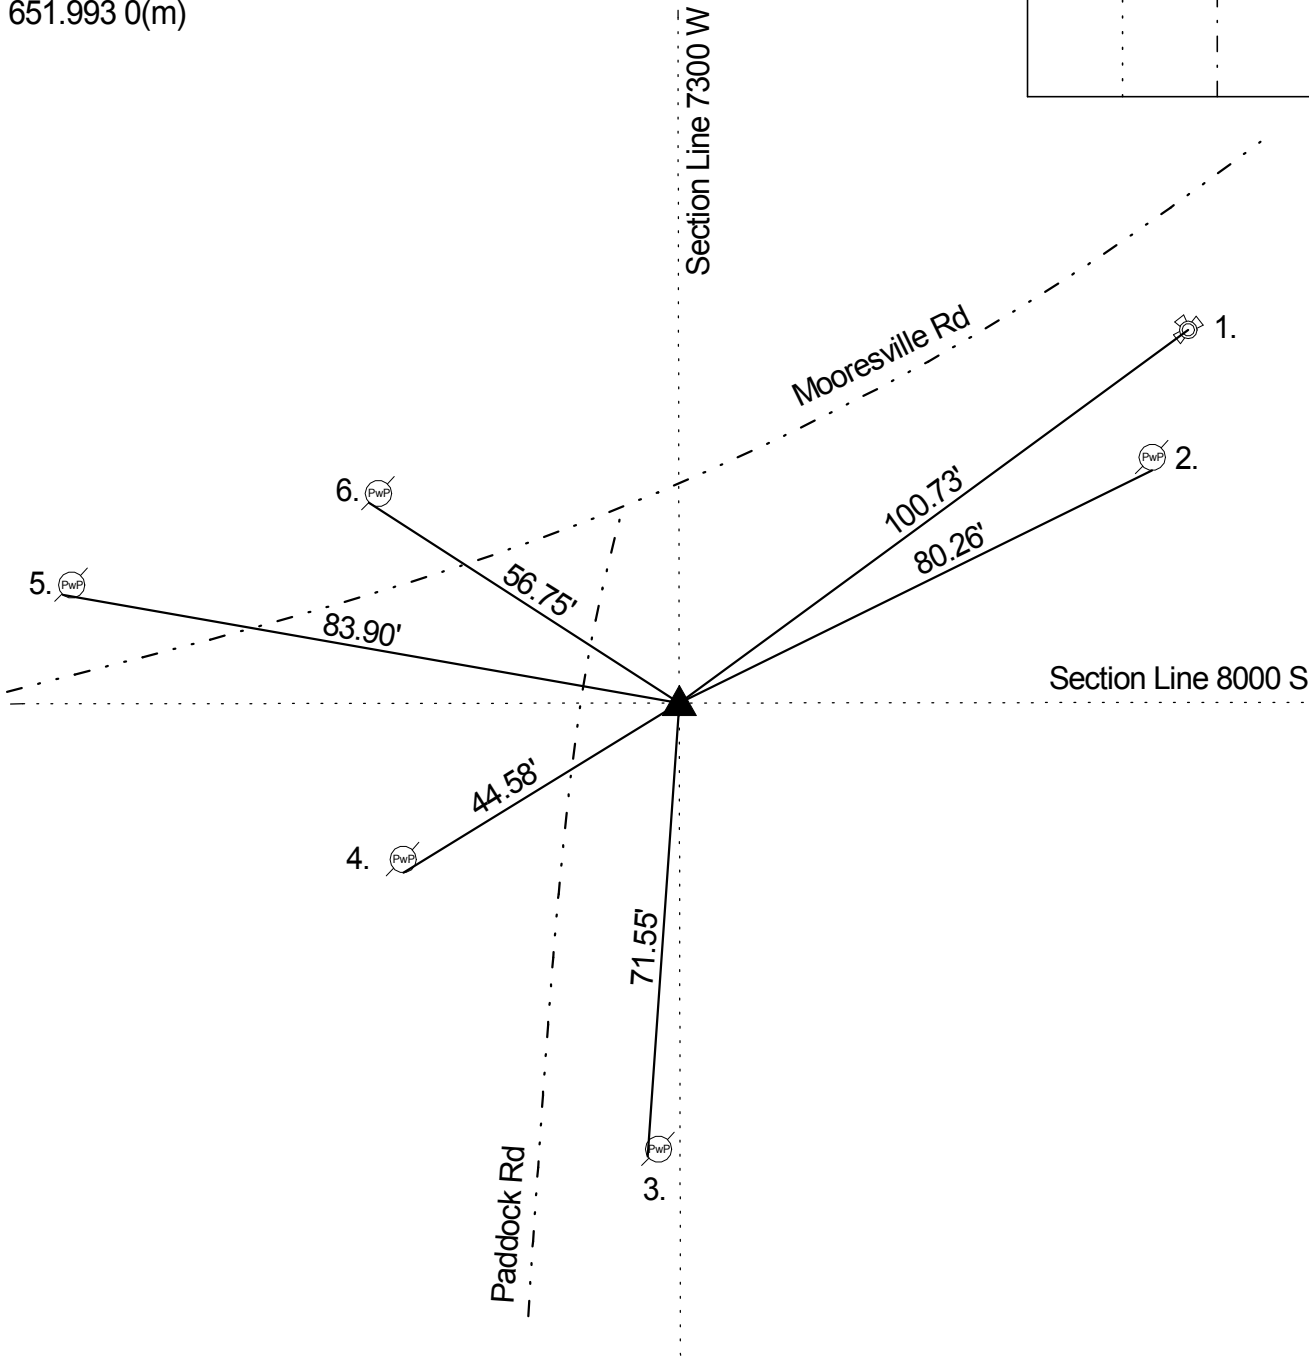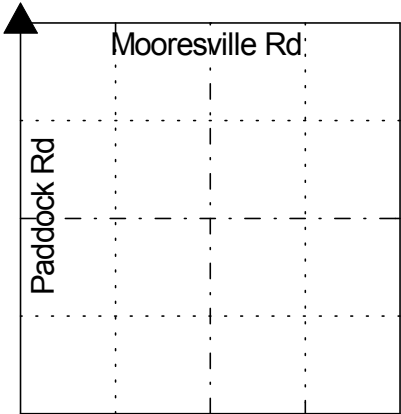

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 12" Beech bearing N 87 W 20 links and a 4" Beech bearing N 89 E 11 links (Marion County Atlas p. 1). A survey by John Coyner on September 26, 1898 indicates a stone (Decatur Legal Book p. 36). A survey by Unversaw on 12/17/1958 called a stone (Decatur Legal Book p. 54). Howe 11/19/74 called a RR spike. Wilcoxen 7/9/85 called a RR spike. Wilcoxen 8/27/87 called a RR spike. Corner excavated by MCS on 6/17/88 and a RR spike was found 3" down. A RR spike was also found 6" down. A 1" iron pin was found 6" down. A stone was found 12" down and a Harrison monument was set in position of the stone. Wilcoxen 10/11/94 called a Harrison monument. Kiste 5/18/1999 called a Harrison. Kiste 1/31/2005 called a Harrison. Corner excavated by Wilcoxen on 5/7/10 and a 3"riser was set on existing Harrison monument.

REF	DISTANCE	DESCRIPTION
1.	100.73'	Top nut of fire hydrant
2.	80.26'	Mag nail w/ MCSO washer S PwP #16-772 12" up
3.	71.55'	Mag nail w/ MCSO washer SW PwP #173-772 12" up
4.	44.58'	PK nail S PwP no # 40" up
5.	83.90'	PK nail SW PwP no # 48" up
6.	56.75'	PK nail SW PwP #23-7712 48" up